


WIDE TEMPERATURE

宽温品


- Wide temperature range of -40~+105°C
适用于 -40~+105°C 的宽温范围
- Standard series for general purposes
标准品通用型
- Load life of 2000 hours at 105°C
在 105°C 环境中负荷寿命 2000 小时
- Comply with the RoHS directive
符合 RoHS 指令



SPECIFICATIONS 特性表

Items 项目	Characteristics 主要特性	
Operation Temperature Range 使用温度范围	-40 ~ +105°C	-25 ~ +105°C
Voltage Range 额定工作电压范围	6.3 ~ 100V	160 ~ 450V
Capacitance Range 静电容量范围	0.47 ~ 15000µF	0.47 ~ 470µF
Capacitance Tolerance 静电容量允许偏差	±20% at 120Hz, 20°C	
Leakage Current 漏电流	Leakage current = 0.01CV or 3µA, whichever is greater (after 2 minutes application of rated voltage) 漏电流 = 0.01CV 或 3µA, 取较大值 (施加额定工作电压 2 分钟后) Leakage current = 0.02CV + 15µA (after 5 minutes application of rated voltage) 漏电流 = 0.02CV + 15µA (施加额定工作电压 5 分钟后)	
Dissipation Factor (tan δ) 损耗角正切	When nominal capacitance is over 1000µF, tan δ shall be added 0.02 to the listed value with increase of every 1000µF. 当标称静电容量大于 1000µF, 其标称静电容量每增加 1000µF, 损耗角正切增加 0.02. Measurement frequency 测试频率: 120Hz, Temperature 温度: 20°C	
Stability at Low Temperature 低温特性	Rated Voltage (V) 额定工作电压	6.3 10 16 25 35 50 63 100 160~250 350~450
	tan δ (max.) 最大损耗角正切	0.24 0.20 0.16 0.14 0.12 0.10 0.09 0.08 0.15 0.20
	Measurement frequency 测试频率: 120Hz	
Load Life 高温负荷特性	Rated Voltage (V) 额定工作电压	6.3 10 16 25~100 160~350 400,450
	Impedance Ratio 阻抗比	Z(-25°C) / Z(20°C) 4 3 2 2 3 8
	Leakage Current 漏电流	Z(-40°C) / Z(20°C) 8 6 4 3 4 —
Shelf Life 高温贮存特性	After 2000 hours (Ø5~Ø8 products are for 1000 hours) application of the rated voltage at 105°C, they meet the characteristics listed below. 在 105°C 环境中施加额定工作电压 2000 小时 (Ø5~Ø8 产品为 1000 小时) 后, 电容器的特性符合下表的要求。	
Marking 标识	Printed with white colour on black sleeve (PET) or printed with white colour on green sleeve (PVC). 黑色胶管白字印刷 (PET) 或绿色胶管白字印刷 (PVC)。	

DRAWING (Unit: mm) 外形图

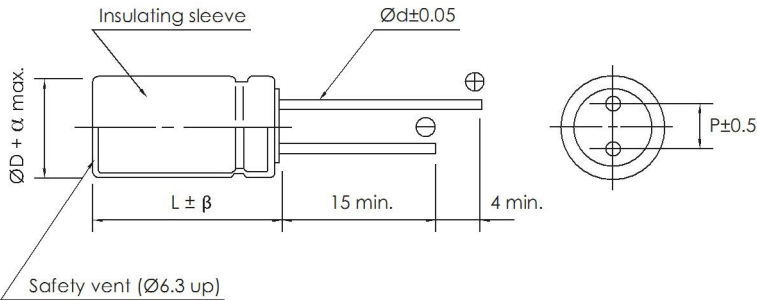

ØD	5	6.3	8 (L≤11.5)	8 (L≤16)	10	13	16	18	22	25
P	2.0	2.5	3.5	5.0	7.5	10.0	12.5			
Ød	0.5	0.6	0.8							
β	1.5	2.0								
α	0.5	1.0								

FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT 纹波电流频率补偿系数

Frequency 频率		50Hz	120Hz	300Hz	1KHz	10KHz~
Coefficient 系数	0.47 ~ 47μF	0.75	1.00	1.35	1.55	2.00
	68 ~ 680μF	0.80	1.00	1.25	1.34	1.50
	1000 ~ 15000μF	0.85	1.00	1.10	1.13	1.15

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.
注: 以上所提供的设计及特性参数仅供参考, 任何修改不作预先通知。如果在使用上有疑问, 请在采购前与我们联系, 以便提供技术上的协助。



DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT
 规格尺寸及最大允许纹波电流

WV Code μF 代码		6.3		10		16		25		35		50		63	
		0J		1A		1C		1E		1V		1H		1J	
0.47	R47											5 x 11	8	5 x 11	8
0.68	R68											5 x 11	9	5 x 11	9
1	010											5 x 11	11	5 x 11	13
2.2	2R2											5 x 11	20	5 x 11	15
3.3	3R3											5 x 11	30	5 x 11	19
4.7	4R7											5 x 11	33	5 x 11	22
6.8	6R8											5 x 11	42	5 x 11	34
10	100					5 x 11	50	5 x 11	38	5 x 11	41	5 x 11	50	5 x 11	50
22	220			5 x 11	50	5 x 11	54	5 x 11	57	5 x 11	61	5 x 11 (6.3x11.5)	78 (85)	6.3 x 11.5	86
33	330			5 x 11	60	5 x 11	64	5 x 11	69	5 x 11	75	6.3 x 11.5	95	6.3 x 11.5	100
47	470	5 x 11	62	5 x 11	71	5 x 11	80	5 x 11	106	5 x 11 (6.3x11.5)	106 (110)	6.3 x 11.5	125	6.3 x 11.5	130
68	680	5 x 11	80	5 x 11	83	5 x 11	85	5 x 11	114	6.3 x 11.5	121	8 x 11.5	144	8 x 11.5	128
100	101	5 x 11	95	5 x 11	100	5 x 11 (6.3x11.5)	120 (135)	5 x 11 (6.3x11.5)	120 (145)	6.3 x 11.5 (8x11.5)	150 (180)	8 x 11.5 (10x12)	188 (200)	8 x 11.5 (10x12)	200 (295)
120	121									8 x 11.5	260				
220	221	5 x 11	150	5 x 11 (6.3x11.5)	155 (175)	6.3 x 11.5	190	6 x 12 6.3 x 11.5 (8x11.5) 8 x 12	190 190 (236) 245	8 x 11.5	270	8 x 12 10 x 12 (10x16)	285 345 (370)	10 x 12	390
330	331	6.3 x 11.5	170	6.3x7 6.3 x 11 (10x12)	165 200 200	8 x 11.5	270	8 x 11.5 (10x12)	310 (335)	10 x 12 (8x16)	395 (455)	10 x 16 (10x20)	420 (460)	10 x 20 (13x21)	510 (560)
470	471	6.3 x 11.5	230	6.3 x 11.5 (8x11.5) (10x12)	260 (290) (320)	8 x 11.5	310	8 x 11.5 (8x16) (10x12)	325 (350) (380)	10 x 16 (10x20) 8 x 16 8 x 20	520 (550) 462 495	10 x 20	560	13 x 21 (13x25)	650 (700)
680	681	6.3 x 10 8 x 11.5	245 314	8 x 11.5 (8x16)	345 (390)	8 x 16 (10x16)	480 (520)	10 x 16	520	10 x 16 (10x20)	550 (590)	13 x 25	720	13 x 25 (16x25)	780 (800)
1000	102	8 x 11.5	380	8 x 11.5 (8x16) (10x12)	400 (425) (585)	8 x 20 (10x16) (10x20) 10 x 12	580 (645) (700) 605	10 x 16 (10x20) (13x21)	705 (775) (845)	10 x 20 13 x 21 (13x25)	785 810 (930)	13 x 25 (16x25)	950 (1080)	16 x 25	930
1500	105							12.5 x 25	925						
2200	222	10 x 12 (10x16)	630 (690)	10 x 20 (13x21)	760 (815)	10 x 20 (13x21)	735 (760)	12.5 x 20 13 x 21 (13x25)	950 890 (1110)	13 x 25 (16x25)	1080 (1260)	16 x 30 16 x 35 (18x35)	1470 1470 (1530)	16 x 31 (18x35)	1565 (2180)
3300	332	10 x 20 (13x21)	845 (920)	13 x 25	1130	13 x 21 (13x25)	980 (1170)	16 x 25	1440	16 x 31 (16x35)	1420 (1480)	18 x 35	1770	22 x 40	2510
4700	472	13 x 25	1240	13 x 25	1280	16 x 25	1320	16 x 25 16 x 31	1550 1650	18 x 35	1900	22 x 40	2340	25 x 40	3000
6800	682	16 x 25	1480	16 x 31	1510	16 x 31	1930	18 x 35	2160	22 x 40	2216	25 x 40	2530		
10000	103	16 x 31	1920	16 x 35	2220	18 x 35	2350	18 x 35	2450						
15000	153	18 x 31	2390												

WV Code μF 代码		100		160		200		250		350		400		450	
		2A		2C		2D		2E		2V		2G		2W	
0.47	R47	5 x 11	14	5 x 11	12	5 x 11	12	5 x 11	12	6.3 x 11.5	12	6.3 x 11.5	12	6.3 x 11.5	12
0.68	R68	5 x 11	15	5 x 11	13	5 x 11	13	5 x 11	13	6.3 x 11.5	13	6.3 x 11.5	13	8 x 11.5	13
1	010	5 x 11	19	5 x 11	16	5 x 11	16	6.3 x 11.5	16	6.3 x 11.5	16	6.3 x 11.5 (8x11.5)	21 (25)	8 x 11.5	27
2.2	2R2	5 x 11	30	6.3 x 11.5	23	6.3 x 11.5	30	6.3 x 11.5	35	8 x 11.5	38	6.3 x 11.5 (8x11.5)	32 (39)	8 x 11.5	39
3.3	3R3	5 x 11	32	6.3 x 11.5	34	6.3 x 11.5	39	8 x 11.5	42	8 x 11.5	43	6.3 x 11.5 (8x11.5)	40 (45)	8 x 11.5	45
4.7	4R7	5 x 11	38	6.3 x 11.5	40	8 x 11.5	46	8 x 11.5 6.3 x 11	45 34	10 x 12	55	8 x 11.5 (10x12)	50 (55)	8 x 11.5 (10x12)	50 (55)
6.8	6R8	5 x 11	52	8 x 11.5	48	8 x 11.5	52	8 x 11.5 (10x12)	52 (57)	10 x 16	62	8 x 12 8 x 16 (10x16)	55 65 (80)	10 x 16	90
10	100	5 x 11 (6.3x11.5)	66 (73)	8 x 11.5 (10x12)	65 (60)	8 x 11.5 (10x12)	65 (70)	10 x 12 (10x16) 8x 11.5	92 (116) 52	10 x 16	95	8x11.5 8 x 12 10 x 16 (10x20)	55 60 95 (105)	10 x 16 10 x 20 13 x 21	95 105 125
15	15R											10x 16 12.5x17	115 135		
22	220	6.3 x 11.5	104	10 x 16	96	10 x 16	140	10 x 17 (10x20)	140 (145)	13 x 21	220	12.5 x 17 13 x 21 (13x25) (16x20)	150 160 (170) (185)	13 x 25	185
												Case size 尺寸		Ripple current 纹波电流	

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.
 注：以上所提供的设计及特性参数仅供参考，任何修改不作预先通知。如果在使用上有疑问，请在采购前与我们联系，以便提供技术上的协助。



☐ DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT 规格尺寸及最大允许纹波电流

μF	Code 代码	100		160		200		250		350		400		450	
		2A		2C		2D		2E		2V		2G		2W	
33	330	8 x 11.5	150	10 x 20	155	10 x 20	170	13 x 21	190	13 x 25	215	12.5 x 25 13 x 25 (16x25)	185 185 (245)	16 x 20 (16x25)	207 (260)
47	470	8 x 11.5 10 x 12	170 190	13 x 21	220	13 x 21	220	13 x 25	250	16 x 25	285	16 x 25 (16x31)	295 (320)	16 x 25 (16x31)	305 (313)
68	680	10 x 16	239	13 x 21	275	13 x 25	270	16 x 25	365	16 x 31	370	16 x 26 16 x 31 (16x35)	305 350 (405)	16 x 35 (18x31)	435 (450)
100	101	10 x 20 10 x 16	320 140	13 x 25	355	16 x 25	385	16 x 31 18 x 20	485 485	18 x 35	485	18x31 (18x35)	420 (540)	18 x 35 (18x40)	520 (560)
120	121													18 x 35	550
150	151					13 x 30	435								
220	221	13 x 25	450	16 x 31	660	16 x 35 (18x31)	695 (755)	18 x 35	760						
330	331	13 x 25 16 x 25	625 720	18 x 35	820	18 x 35 (18x40)	820 (965)								
470	471	16 x 25	780	18 x 40	975	22 x 40	1050							Case size 尺寸	Ripple current 纹波电流
680	681	16 x 35	1021												
1000	102	18 x 40	1344												

•Case size $\varnothing D \times L$ (mm), ripple current (mA rms) at 105°C, 120Hz •尺寸 $\varnothing D \times L$ (mm), 纹波电流(mA rms)于 105°C, 120Hz

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注: 以上所提供的设计及特性参数仅供参考, 任何修改不作预先通知。如果在使用上有疑问, 请在采购前与我们联系, 以便提供技术上的协助。

